


Line reactors

Line reactors reduce the input harmonic currents.



| Type | Nominal current | Mot max power | Inductance | L (mm) | P (mm) | H (mm) | Hitachi Inverter | |
|--------------|-----------------|---------------|------------|--------|--------|--------|-------------------|-------------------|
| TB 3*1200/10 | 10 A | 4 KW | 1200 µH | 130,00 | 70,00 | 110,00 | SJ/L 200 015 HFEF | SJ/L 200 040 HFEF |
| TB 3*800/18 | 18 A | 7,5 KW | 800 µH | 130,00 | 80,00 | 110,00 | SJ/L 200 055 HFEF | SJ/L 200 075 HFEF |
| TB 3*670/22 | 22 A | 11 Kw | 670 µH | 160,00 | 80,00 | 170,00 | SJ 300 075 HFE | L 300 P 110 HFE |
| TB 3*500/29 | 29 A | 15 Kw | 508 µH | 160,00 | 80,00 | 170,00 | SJ 300 110 HFE | L 300 P 150 HFE |
| TB 3*400/37 | 37 A | 18.5 Kw | 398 µH | 160,00 | 100,00 | 180,00 | SJ 300 150 HFE | L 300 P 185 HFE |
| TB 3*340/43 | 43 A | 22 Kw | 342 µH | 160,00 | 100,00 | 180,00 | SJ 300 185 HFE | L 300 P 220 HFE |
| TB 3*260/57 | 57 A | 30 Kw | 258 µH | 180,00 | 120,00 | 190,00 | SJ 300 220 HFE | L 300 P 300 HFE |
| TB 3*210/70 | 70 A | 37 Kw | 210 µH | 180,00 | 120,00 | 200,00 | SJ 300 300 HFE | L 300 P 370 HFE |
| TB 3*170/85 | 85 A | 45 Kw | 173 µH | 220,00 | 130,00 | 220,00 | SJL 300 370 HFE | L 300 P 450 HFE |
| TB 3*140/105 | 105 A | 55 Kw | 140 µH | 190,00 | 160,00 | 180,00 | SJ 300 450 HFE | L 300 P 550 HFE |
| TB 3*110/135 | 135 A | 75 Kw | 109 µH | 220,00 | 160,00 | 180,00 | SJ 300 550 HFE | L 300 P 750 HFE |
| TB 3*092/160 | 160 A | 90 Kw | 92 µH | 220,00 | 180,00 | 180,00 | SJ 300 750 HFE | L 300 P 900 HFE |
| TB 3*75/195 | 195 A | 110 Kw | 75 µH | 250,00 | 150,00 | 210,00 | SJ 300 900 HFE | L 300 P 1100 HFE |
| TB 3*64/230 | 230 A | 132 Kw | 64 µH | 250,00 | 160,00 | 210,00 | SJ 300 1100 HFE | L 300 P 1320 HFE |

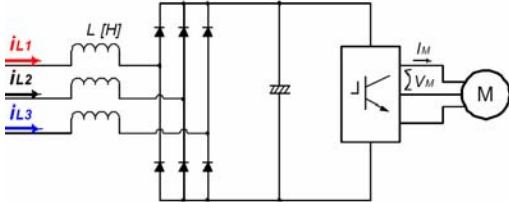