

Frequency Inverter L100IP Series

Frequency Inverter Series IP 54

HITACHI
Inspire the Next



- Capacity Range: 0.4-7.5kW
- PID Control
- Automatic Voltage Regulation
- Motor Thermistor Input
- Fieldbus Interfaces for Profibus, DeviceNet, CANopen (optional)
- Digital Display
- Integrated EMC-Filter
- Meets CE Standards
and many more

Frequency Inverter L100IP Series


Frequency Inverter Series IP 54

All features at a glance

Inverter L100 IP	200 V - Series						400 V - Series					
	004 NFE	007 NFE	015 NFE	022 NFE	007 HFE	015 HFE	022 HFE	040 HFE	055 HFE	075 HFE		
Applicable motor (kW)	0.37	0.75	1.5	2.2	0.75	1.5	2.2	4.0	5.5	7.5		
Rated output current (A)	2.6	4.0	7.1	10	2.5	3.8	5.5	8.6	13	16		
Rated input voltage	1 or 3 ~ 200...240 V, -10 % +5 %, 50/60 Hz, ±5 %						3 ~ 380 ... 460 V, ±10 %, 50/60 Hz, ±5 %					
Rated output voltage	3 ~ 0 - 200...240 V (corresponding to input voltage)						3 ~ 0 - 380...460 V (corresponding to input voltage)					
Output frequency range	0.5...360 Hz											
Frequency accuracy (at 25 °C ±10 °C)	Analogue command ±0.1 %, digital command ±0.01 %											
Frequency resolution	Analogue setting: Maximum frequency/1000, digital setting: 0.1 Hz											
V/f characteristics	Constant torque, reduced torque											
Overload capacity	150 % for 60 s											
Acceleration/deceleration time	0.1 to 3000 sec. (linear/curve, accel./decel. selection) Two stage accel./decel.											
Starting torque	100 % or more (when torque boost has been set)											
Braking	Dynamic braking	External dynamic braking unit (option)										
	DC braking	Braking force, time and operating frequency										
Inputs	Intelligent input terminals	5 inputs, NO or NC, 24V PNP-logic										
	Analogue inputs	Voltage 0...10 V, current 4...20 mA										
Outputs	Intelligent output terminals	2 outputs, type "open collector", OD (deviation signal at PID control), RUN (running signal), FA1, 2 (frequency arrival signal), AL (alarm signal), OL (overload advance notice signal)										
	Analogue outputs	PWM (analogue/digital) analogue output frequency, analogue output current or digital output frequency										
	Relay output	Alarm signal, single change over contact										
PID loop operation	Air velocity, temperature etc.											
Thermal motor protection	Thermistor input (PTC)											
Serial port	RS422											
Bus systems (optional)	Profibus, DeviceNet											
Conformity	CE, UL, cUL, c-Tick											
Protective function	Overcurrent, overvoltage, undervoltage, overload, extreme high temperature, ground fault protection at startup, electronic thermal overload protection											
Environmental conditions	Temperature / humidity	-10...+40 °C (50 °C with derating) temperature, 25...90 % humidity (non condensing)										
	Vibration / location	5.9 m/s ² , 10...55 Hz, altitude 1000 m or less indoors, IP54 or equivalent										
Standards	EN50082-1 and -2, EN50081-1 and 2 (with filter), EN50178											
Option	Remote operator unit, Profibus, DeviceNet EMI filter, AC reactor, DC reactor											
Protection class	IP54 Metal housing with protection class IP54 with integrated line filter class "B"											
Weight kg (approx.)	7.5	7.6	8.0	8.1	7.8	8.1	8.4	8.5	9.4	9.6		

L100IP Series Dimensions

L100IP		004 NFE	007 HFE	055 HFE
		007 NFE	015 HFE	075 HFE
		015 NFE	022 HFE	
		022 NFE	040 HFE	
Width	mm	185	185	205
Height	mm	490	490	490
Depth	mm	260	260	340

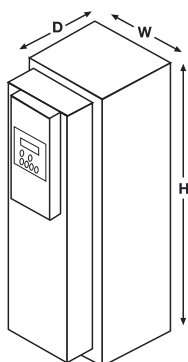

Hitachi Europe GmbH

Am Seestern 18 · D-40547 Düsseldorf
Tel. +49-211-52 83 -0 · Fax +49-211-52 83 -649
Internet: www.hitachi-ds.com
E-Mail: info@hitachi-ds.com

