


## UniOP eTOP06C

The eTOP06C is a low-cost HMI device with touchscreen interface and a state-of-the-art 5.7" TFT display with a bright LED backlight. The enhanced graphical capabilities compared to the basic eTOP06 make it the ideal choice for demanding applications on a limited budget. The integrated 10/100 Ethernet interface makes connectivity in complex control systems much more efficient.

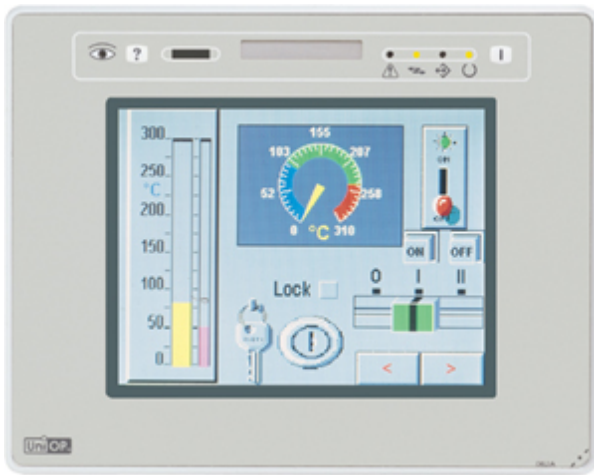

- 5.7" TFT color display
- LED backlight
- 1/4 VGA resolution
- Resistive touchscreen
- 10/100 Ethernet interface
- Connection to industrial bus systems (requires optional plug-in modules)
- Compatible with video input module
- 64 MB user memory
- Compatible with local I/O

### Highlights

The eTOP HMI panels are part of the UniOP family of touchscreen products. All of the eTOP products support the rich common functionalities of the UniOP operator panels:

- Powerful and intuitive programming with the UniOP Designer 6 software
- Support of more than 150 communication drivers for industrial devices
- Integrated Ethernet port for connection to field devices as well as programming the HMI from Designer.
- Optional modules for fieldbus systems (Profibus DP, CANopen, DeviceNet, Interbus)
- Dual-driver communication capability
- Vector graphic capabilities including the support of multiple layers and object transparency.
- Video input option
- Display dynamic data in numerical, text, bargraph and graphic image formats
- Data acquisition and trend presentation. Trend data can be transferred to a host computer using the Ethernet connection.
- Analog gauge objects
- Recipe data storage. Recipe data can be transferred to a host computer using the Ethernet connection.
- Multilanguage applications. The number of runtime languages is limited only by the available memory. All text information in the application can be exported in Unicode format for easier translation.
- Powerful macro editor to configure touchscreen operation
- Alarms and historical alarm list. Alarm and event information can be printed or transferred to a host computer using the Ethernet connection.
- Eight level password protection.
- Report printing to serial printer. Reports are freely configurable using Designer.
- Ethernet-based UniNet network to share data between UniOP HMIs and to serve data using UniNet OPC Server.

## Technical Data

### Display

Type	TFT
Resolution	¼ VGA, 320x240 pixel
Active display area	115x86 mm (5.7" diagonal)
Colors	64K
Backlight	LED
Brightness	130 Cd/m <sup>2</sup> typ.
Dimming	Yes

### Memory

User memory	64 MB internal Flash
Alternate User memory	Optional removable 32/64 MB SSFDC memory card

### Front panel

Touch screen	Analog resistive
Function keys	1
System keys	-
User LED's	1
System LED's	4

### Interfaces

PC/Printer port	Yes
PLC port	RS-232, RS-485, RS-422, 20 mA Current Loop
Ethernet port	10/100 Mbit
Aux port (fieldbus)	Yes, with optional modules
DX port (video input)	Yes
Serial programming speed	9600 – 38400 bps
Local I/O	Yes, with optional modules

### Functionality

Vector graphics	Yes
Dual driver capability	Yes
Video input	Yes
Data acquisition and trends	Yes
Recipe memory	32 KB
UniNet network	Client/Server
Alarms	1024

Event list	1024
Password	Yes
Hardware RTC	Yes, battery backed
Screen saver	Yes
Buzzer	Yes, audible feedback for touch screen

### Ratings

Power supply voltage	24 V DC (18 to 30 Vdc)
Current consumption	1A at 24Vdc(max.)
Fuse	Automatic
Weight	Approx 1.4 Kg
Battery	3 V 285 mA Lithium, non rechargeable, user replaceable, RENATA model CR2430. Replace with same component or equivalent.

### Environmental Conditions

Operating temperature	0 to 50 °C
Storage temperature	-20 to +70 °C
Operating and storage humidity	5 – 85 % RH non-condensing
Protection class	IP65 (front panel) IP20 (rear)

### Dimensions

Faceplate LxH	187x147 mm (7.36x5.79")
Cutout AxB	176x136 mm (6.93x5.35 ")
Mounting depth (type 0050)	91 mm (3.58")

### Approvals

CE	Emission EN 61000-6-4 Immunity EN 61000-6-2 for installation in industrial environments
----	---

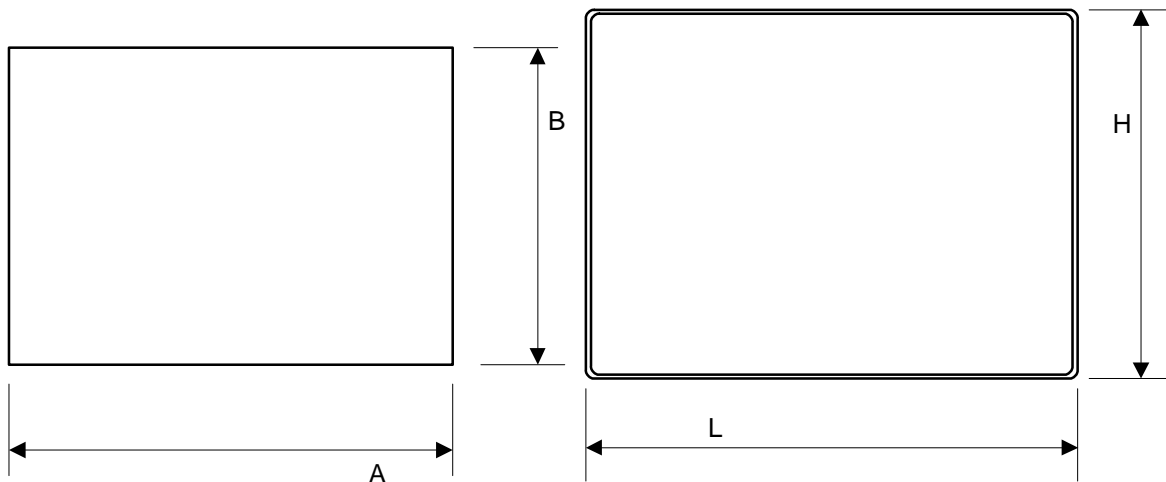


Figure 1 – Cutout and front view

### Ordering Information

eTOP06C-0050

5.6" 1/4 VGA TFT color touchscreen with Ethernet interface.  
Compatible with local I/O

PROT-03

Disposable protection foil for 5.6" eTOP touch panels (10 pieces)

**Tn267**

**Ver. 1.2**

**Copyright © 2007, 2008 Sitek S.p.A. – Verona, Italy**

Subject to change without notice

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained in this documentation, it is provided "as is" without warranty of any kind.

[www.uniop.com](http://www.uniop.com)